


2210/600V

Designation : Stacking Retractable Sleeve 4 mm Banana (male) Plug to Stacking Retractable Sleeve 4 mm Banana (male) Plug Lead.

Applications : to connect to single port 4 mm banana jacks, sockets, and binding posts while covering the plugs. General purpose electric testing, controlling, and measuring.

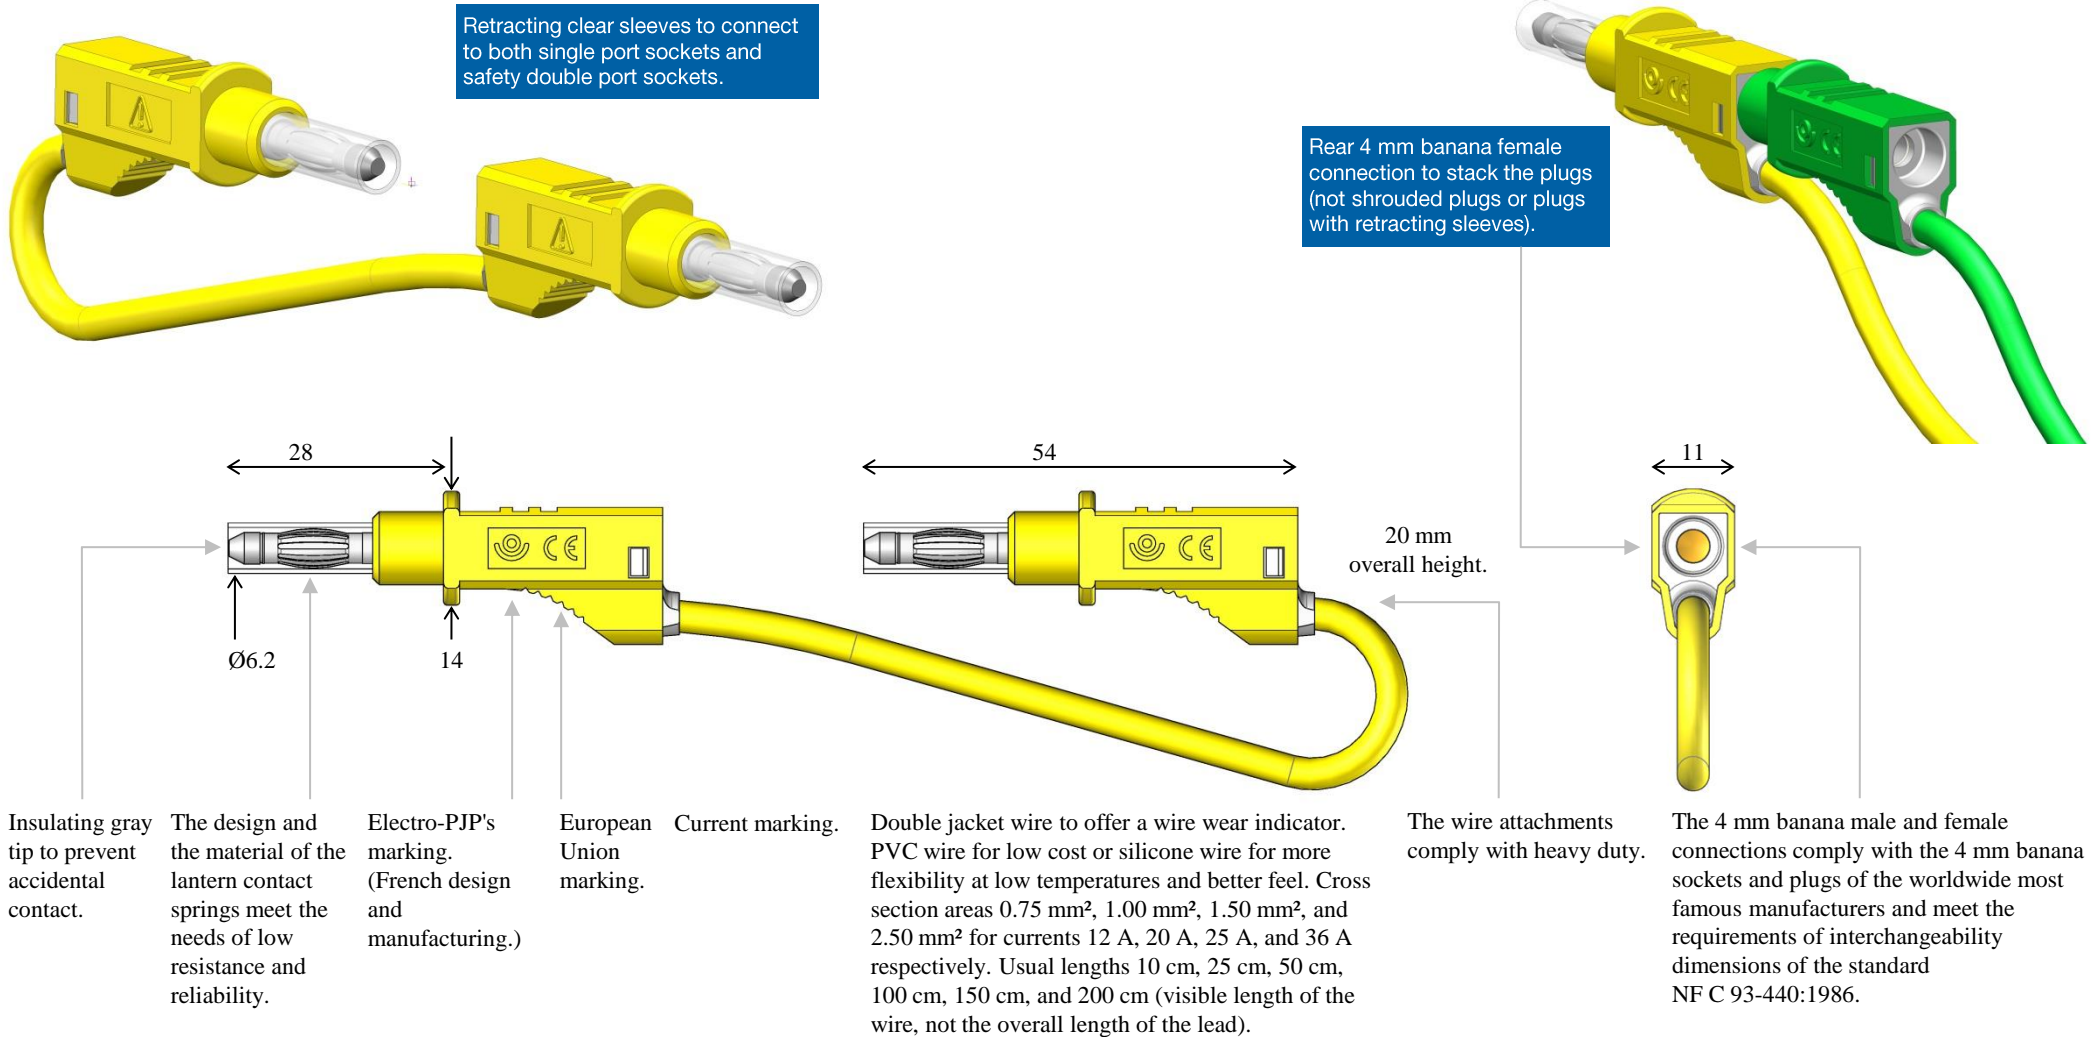

# 2210/600V



## DATA SHEET (page 2 of 2).


Designation : Stacking Retractable Sleeve 4 mm Banana (male) Plug to Stacking Retractable Sleeve 4 mm Banana (male) Plug Lead.

### Electrical safety

600 V CAT II

According to EN / IEC 61010-031:2015. 600 V CAT II, reinforced insulation, up to 36 A (at +40 °C) depending on the wire.

These specifications come from the creepage distances, clearances, accessible parts, and solid insulation of the lead. And the considered specifications of the environment are :  
pollution degree, 1 or 2 ;  
relative humidity, 80 % maximum for temperatures up to 31 °C decreasing linearly to 50 % relative humidity at +40 °C ;  
temperature range, +5 °C to +40 °C ;  
indoor use ; and  
altitude, 2000 m maximum.

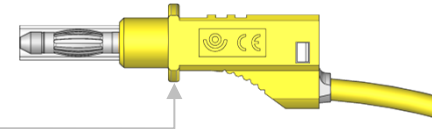

Barrier. Keep behind this barrier to operate safely the lead while connecting to hazardous live voltages (more than 30 V AC and 60 V DC).

### Operating temperature range

-20 °C mini., +80 °C maxi. (please see above too).

### Conformity

- European Directive "Low Voltage Directive" 2014/35/EU.
- International / European standard EN / IEC 61010-031:2015.
- European Directive "RoHS" 2011/65/EU. European Directive 2015/863/EU.
- European regulation n°1907 / 2006 "REACH".
- European regulation 2017 / 821 "Conflict minerals".
- French standard NF C 93-440:1986.

### Environment

- "RoHS" compliant, Pb ≤ 4 %, Hg ≤ 0.1 %, Cr VI ≤ 0.1 %, Cd ≤ 0.01 %, PBB ≤ 0.1 %, PBDE ≤ 0.1 %, DEHP ≤ 0.1 %, BBP ≤ 0.1 %, DBP ≤ 0.1 %, and DIBP ≤ 0.1 %.
- REACH compliant, no substances from the candidate list of SVHC for authorization at mass concentrations greater than 0.1 %.

### Materials

Conductors : nickel-coated brass, red annealed copper, and steel. Wire jackets : PVC or silicone. Insulators and lantern contact spring, please contact us.

### Colors

Black Red Yellow Green Blue White

### Length

10 cm, 25 cm, 50 cm, 100 cm, 150 cm, 200 cm (usual lengths).

### Origin

Designed and manufactured in France.

### Reliability benchmark

Year of 1st placing on the market 1994.

### Packaging

Bag of 10 units of the same color, wire, and length (default packaging).

## GLOSSARY :

- ACCESSIBLE.** Able to be touched with a standard test finger or test pin.
- BASIC INSULATION.** Insulation of HAZARDOUS LIVE parts which provides basic protection.
- CAT II.** Measurement or overvoltage category II. For measurement performed on / equipment connected to the building wiring.
- CAT III.** Measurement or overvoltage category III. For measurement performed on / equipment connected to part of a building wiring installation.
- CAT IV.** Measurement or overvoltage category IV. For measurement performed on / equipment connected to the origin of the electrical supply to a building.
- CLEARANCE.** Shortest distance in air between two conductive parts.
- CREEPAGE DISTANCE.** Shortest distance along the surface of a solid insulating material between two conductive parts.
- CTI.** Comparative Tracking Index of the insulating material in accordance with IEC 60112.
- DOUBLE INSULATION.** Insulation comprising both BASIC INSULATION and SUPPLEMENTARY INSULATION.
- EN / IEC 60529.** European / international standard regarding the degrees of protection provided by enclosures.
- EN / IEC 61010-1.** European / international standard regarding the safety requirements for electrical equipment for measurement, control, and laboratory use – Part 1: General requirements.
- EN / IEC 61010-031.** European / international standard regarding the safety requirements for electrical equipment for measurement, control and laboratory use – Part 031: Safety requirements for hand-held probe assemblies for electrical measurement and test.
- "LVD".** European Directive 2014/35/EU on the harmonization of the laws of Member States relating to electrical equipment designed for use within certain voltage limits. (Usually called the Low Voltage Directive.)
- MAINS.** Low-voltage electricity supply system to which the equipment concerned is designed to be connected for the purpose of powering the equipment.
- MAINS CIRCUIT.** Circuit which is intended to be directly connected to the MAINS for the purpose of powering the equipment.
- OVERVOLTAGE CATEGORY.** Numeral defining a TRANSIENT OVERVOLTAGE condition.
- POLLUTION.** Addition of foreign matter, solid, liquid or gaseous (ionized gases), that may produce a reduction of dielectric strength or surface resistivity.
- POLLUTION DEGREE.** Numeral indicating the level of POLLUTION that may be present in the environment.
- POLLUTION DEGREE 1.** No POLLUTION or only dry, non-conductive POLLUTION occurs, which has no influence.
- POLLUTION DEGREE 2.** Only non-conductive POLLUTION occurs except that occasionally a temporary conductivity caused by condensation is expected.
- REINFORCED INSULATION.** Insulation which provides protection against electric shock not less than that provided by DOUBLE INSULATION.
- "RoHS".** European Directive 2011/65/EU on the restriction of the use of certain hazardous substances in electrical and electronic equipment.
- SOLID INSULATION.** Insulating materials.
- SUPPLEMENTARY INSULATION.** Independent insulation applied in addition to BASIC INSULATION in order to provide protection against electric shock in the event of a failure of BASIC INSULATION.
- TRANSIENT OVERVOLTAGE.** Short duration overvoltage of a few milliseconds or less, oscillatory or non-oscillatory, usually highly damped.
- WORKING VOLTAGE.** Highest r.m.s. value of the a.c. or d.c. voltage across any particular insulation which can occur when the equipment is supplied at rated voltage.

Configure your lead and contact us :

- Wire jackets ?
- Wire cross section area and / or current ?
- Color ?
- Length ?

sales@electro-pjp.com

+33(0) 384 821 330

www.electro-pjp.com

ELECTRO-PJP  
ZI «Charmes d'Amont»  
13 rue de Madrid  
39500 TAVAUX  
FRANCE